

HP Max

DURABLE ACRYLIC URETHANE ENAMEL



HP Max is a durable, water-based cross-linked acrylic urethane coating. It has excellent adhesion to a variety of properly prepared surfaces, and exhibits outstanding scrub-resistance for the painted substrate. HP Max is perfect for surfaces such as interior/exterior doors, trim, woodwork, foottraffic floors, cabinetry, and properly prepared ferrous and non-ferrous metals. The finished surface will be highly resistant to hand-oils, and is able to withstand repeated cleaning. Helps to inhibit the growth of mold and mildew, making it a choice finish for moisture-rich environments.

- High Quality Acrylic Urethane
- Superior Wash and Scrub Resistance
- Interior/Exterior
- Hand Oil Resistant
- Moderate Foot Traffic

EGGSHELL


Ideal for projects where a deep, rich look is desired yet only a minimal sheen is needed. It is designed for areas that require minimal washability and have limited use.

SATIN

This finish will minimize dirt pickup and is washable. Ideal for rooms that have an average amount of use and where a deep, rich look with some sheen and washability are desired.

SEMIGLOSS

This high-sheen product is very washable and perfect for areas that are more susceptible to dirt, grease and moisture. Ideal for high-traffic areas or the most used rooms in a home, such as the den, bathroom, or kitchen.

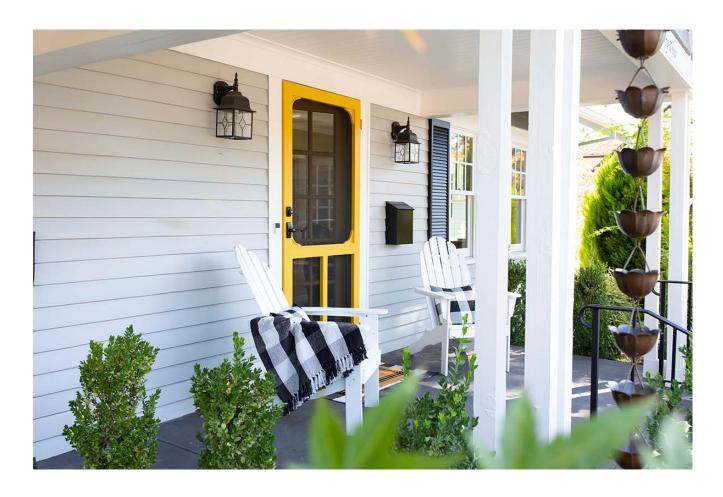

SPECIFICATIONS FOR HP MAX

	EGGSHELL	SATIN	SEMIGLOSS
VOLUME SOLIDS	34%	34%	34%
VISCOSITY	95-102 KU	95-102 KU	95-102 KU
WEIGHT PER GALLON	10 (LB)	10 (LB)	10 (LB)
GLOSS	6-9%@60° 8-20%@85°	10-20%@60° 30-40%@85°	35-55%@60° 60-70%@85°
V.O.C. (MINUS WATER)	<100 g/L	<100 g/L	<100 g/L

COVERAGE: Approximately 300-400 square feet per gallon @1.5 dry mils. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface.

DRY TIME: One hour to touch and six hours to recoat @70°F and 50% relative humidity.

ABOUT MILLER PAINT

Manufactured in Portland, Oregon since 1890, Miller Paint is an employee-owned company with over 50 stores throughout Oregon, Washington and Idaho. Miller Paint products are specifically formulated for the Pacific Northwest climate and are known for outstanding quality and durability. Praised for exceptional customer service and color expertise, Miller Paint is the region's go-to paint for homeowners and professionals alike.

For a location near you, go to www.millerpaint.com

Specification figures should be taken as accurate for products being produced at the time of publication in untinted white bases only. Formulation improvements may be made from time to time that may affect these figures to some degree. Manufacturing tolerances of +/-2% are considered acceptable. Whenever a change is made that the Manufacturer considers substantial, the specification will be revised. Miller Paints are registered trademarks of Miller Paint Co., Inc. Portland, OR.REV 9/16